


MSS 精密ボールねじMPシリーズ/精密度等級C3

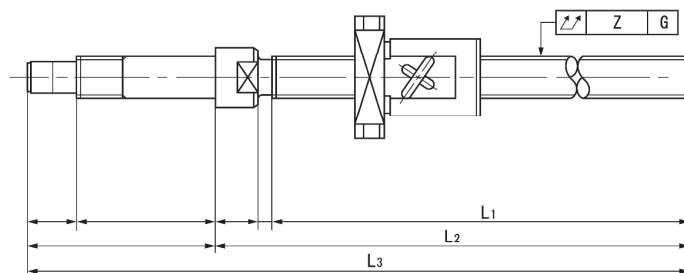

(単位: mm)

形式番号	軸方向すきま	L ₁	L ₂	L ₃ (最大値)	軸全振れ (Z)	予圧トルク (daN・cm)	リード精度	ワイパ
MP0802DS-AAFR-0170B-C3S	0 (予圧品)	122	133	(170)	0.030	0.03~0.20	ねじ部有効長さ Ec=0.010 e _c =0.008	F
MP0802DS-AAFR-0250B-C3S	0 (予圧品)	202	213	(250)	0.035	0.03~0.20	ねじ部有効長さ Ec=0.012 e _c =0.008	F
MP1002DS-EAFR-0210B-C3S	0 (予圧品)	162	173	(210)	0.030	0.03~0.25	ねじ部有効長さ Ec=0.010 e _c =0.008	F
MP1002DS-EAFR-0320B-C3S	0 (予圧品)	272	283	(320)	0.040	0.03~0.25	ねじ部有効長さ Ec=0.012 e _c =0.008	F
MP1202DS-AAPR-0300B-C3S	0 (予圧品)	242	255	(300)	0.030	0.04~0.32	ねじ部有効長さ Ec=0.012 e _c =0.008	P
MP1202DS-AAPR-0400B-C3S	0 (予圧品)	342	355	(400)	0.040	0.04~0.32	ねじ部有効長さ Ec=0.013 e _c =0.010	P
MP1205DS-BALR-0300B-C3S	0 (予圧品)	240	255	(300)	0.030	0.15~0.5	ねじ部有効長さ Ec=0.012 e _c =0.008	L
MP1205DS-BALR-0450B-C3S	0 (予圧品)	390	405	(450)	0.050	0.15~0.5	ねじ部有効長さ Ec=0.013 e _c =0.010	L
MP1505DS-BALR-0400B-C3S	0 (予圧品)	340	355	(400)	0.035	0.15~0.6	ねじ部有効長さ Ec=0.013 e _c =0.010	L
MP1505DS-BALR-0600B-C3S	0 (予圧品)	540	555	(600)	0.045	0.15~0.6	ねじ部有効長さ Ec=0.016 e _c =0.012	L

注) ワイパの種類 F: フェルト / L: リップシール / P: プラスチック